OPERATOR'S MANUAL



gaelco

P C B CONECTOR JAMMA

SOLDER SIDE			COMPONENTS SIDE
G N D	A	1	G N D
G N D	B	2	G N D
+ 5V	C	3	+ 5V
+ 5V	D	4	+ 5V
N.C.	E	5	N.C.
+ 12V	F	6	+ 12V
	H	7	
COIN COUNTER 2	J	8	COIN COUNTER 1
(COIN LOCK OUT 2)	K	9	(COIN LOCK OUT1)
SPEAKER (-)	L	10	SPEAKER (+)
N.C.	M	11	N.C.
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	P	13	VIDEO BLUE
SERVICE SW	R	14	VIDEO GND
N.C.	S	15	TEST SW
COIN 2	T	16	COIN 1
2P START	U	17	1P START
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P SHOT	Z	22	1P SHOT
2P JUMP	a	23	1P JUMP
N.C.	b	24	N.C.
N.C.	c	25	N.C.
N.C.	d	26	N.C.
G N D	e	27	G N D
G N D	f	28	G N D

CONTROL PANEL



CONTROL STICK



HARD SOFT

MONITOR	HORIZONTAL
GAME STYLE	1 PLAYER o 2 PLAYERS SIMULTANEOUS

POSITIONS OF DIP SW

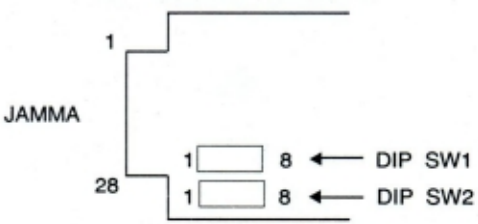

COIN / CREDIT OPTION SWITCH SETTING

DIP SW 1

OPTION			S1	S2	S3	S4	S5	S6	S7	S8
COIN 1	1 COIN	1 CREDIT						OFF	OFF	OFF
	2 COINS	1 CREDIT						OFF	OFF	ON
	3 COINS	1 CREDIT						OFF	ON	OFF
	4 COINS	1 CREDIT						OFF	ON	ON
	5 COINS	1 CREDIT						ON	OFF	OFF
	6 COINS	1 CREDIT						ON	OFF	ON
	3 COINS	2 CREDITS						ON	ON	OFF
	4 COINS	3 CREDITS						ON	ON	ON
COIN 2	1 COIN	1 CREDIT			OFF	OFF	OFF			
	1 COIN	2 CREDITS			OFF	OFF	ON			
	1 COIN	3 CREDITS			OFF	ON	OFF			
	1 COIN	4 CREDITS			OFF	ON	ON			
	1 COIN	5 CREDITS			ON	OFF	OFF			
	1 COIN	6 CREDITS			ON	OFF	ON			
	2 COINS	3 CREDITS			ON	ON	OFF			
	3 COINS	4 CREDITS			ON	ON	ON			
MODE 2 PLAYERS	5 GAMES START 2 CR./CONT. 2 CR.			OFF						
	3 GAMES START 2 CR./CONT. 1 CR.			ON						
FREE PLAY		NO	OFF							
		YES	ON							

OPTION SWITCH SETTING

DIP SW 2

OPTION			S1	S2	S3	S4	S5	S6	S7	S8
GAME DIFICULTY	1 NORMAL								OFF	OFF
	2 EASY								OFF	ON
	3 HARD								ON	OFF
	4 HARDEST								ON	ON
NUMBER OF FAULTS PER CREDIT	5						OFF	OFF		
	4						OFF	ON		
	6						ON	OFF		
	7						ON	ON		
ADVERTISE SOUND		NO			OFF					
		YES			ON					
TEST MODE		NO	OFF							
		YES	ON							

escipión, 9-11 - tel. 417 36 26 - fax 417 28 02 - 08023 barcelona (spain)

gaelco